



T34W TELEPHONE SET

USER GUIDE

Welcome to the Cloud! Thank you for choosing SonicTel as your managed service provider. This manual will guide you through the initial setup and teach you the basic functions of your new enterprise phone system.


BASIC CALL FEATURES

PLACING A CALL

Using the handset:

1. Pick up the handset
2. Enter the number, and then press **SEND**

Using the speakerphone:

1. With the handset on-hook, press 
2. Enter the number, and then press **SEND**

Using the headset:

1. With the headset connected, press  to activate the headset mode
2. Enter the number, and then press **SEND**

Note: During a call, you can alternate between the headset, hands-free speakerphone, and headset modes by pressing the Headset key, the Speakerphone key, or by picking up the handset. Headset mode requires a connected headset

ANSWERING A CALL

Using the handset:

1. Pick up the handset

Using the speakerphone:

1. Press 

Using the headset:

1. Press 

Note: You can ignore an incoming call by pressing the REJECT soft key

ENDING A CALL

Using the handset:

1. Hang up on the handset or press **ENDCALL**




Using the speakerphone:

1. Press  or **ENDCALL**



Using the headset:

1. Press **ENDCALL**

REDIAL

1. Press  to enter the Placed Calls list, select the desired entry, then press  or **SEND**
2. Press  twice when the phone is idle to dial out the last dialed number

CALL MUTE & UN-MUTE

1. Press  to mute the microphone during a call
2. Press  again to un-mute the call

CALL HOLD & RESUME

Note: Only applicable when a call is active on your extension

To place a call on hold:

1. Press **HOLD** during an active call

To resume the call, do one of the following:

1. If there is only one call on hold, press **RESUME**
2. If there is more than one call on hold, press select the desired call, and press **RESUME**

CALL TRANSFER

You can transfer a call in the following ways:

Blind Transfer

1. Press the **TRANS** soft key during an active call
2. Enter the number you want to transfer to
3. Press **BTRANS**

Semi-Attended Transfer

- Press the **TRANS** soft key during an active call
- Enter the number you want to transfer to, press **SEND**
- Press the **TRANS** soft key when you hear the ring-back tone

Attendant Transfer

1. Press the **TRANS** soft key during an active call
2. Enter the number you want to transfer to, press **SEND**
3. Press the **TRANS** soft key when the second party answers

CALL FORWARD

To enable call forward:

1. Press **MENU** when the phone is idle, and then select **Features > Call Forward**
2. Select the desired forward type:
 - a. **Always Forward** - Incoming calls are forwarded unconditionally
 - b. **Busy Forward** - Incoming calls are forwarded when the phone is busy
 - c. **No Answer Forward** - Incoming calls are forwarded if not answered after a period of time
3. Enter the number you want to forward to. **For No Answer Forward**, select the desired ring time to wait before forwarding from the **After Ring Time** field
4. Press the **SAVE** soft key to accept the change

CALL CONFERENCE

1. Press **CONF** during an active call. The call is placed on hold
2. Enter the number of the second party, and then press **SEND**
3. Press **CONF** again when the second party answers. All parties are now joined in the conference
4. Press **END CALL** to disconnect all parties

*Note: You can split the conference call into two individual calls by pressing **SPLIT***

SPEED DIAL

To configure the speed dial:

1. Press **MENU** when the phone is idle, and then select **Features > DSS keys**
2. Select the desired DSS key, and press **ENTER**
3. Select the **SPEEDDIAL** from the **Type** field, select the desired line from the **Account ID** field, enter a label in the **Label** field, enter the number in the **Value** field
4. Press **SAVE** to accept the change

To use the speed dial key:

Press **SPEEDDIAL** to dial out the preset number.



VOICE MESSAGE

The message waiting indicator on the idle screen indicates that one or more voice messages are waiting at the message center. The power indicator LED slowly flashes red.

To listen to voice messages:

1. Press the  key OR **CONNECT**
2. Follow the voice prompts to listen to your messages

CALL HISTORY

1. Press the **HISTORY** soft key when the phone is idle, press  or  to scroll through the list
2. Select an entry from the list, you can do the following:
 - a. Press **SEND** to call the entry
 - b. Press **DELETE** to delete the entry from the list

If you press **OPTION**, you can also do the following:



1. Select **DETAIL** to view the detailed information about the entry
2. Select **ADD TO CONTACT** to add the entry to the local directory
3. Select **ADD TO BLACKLIST** to add the entry to the blocklist
4. Select **DELETE ALL** to delete all entries from the list

CONTACT DIRECTORY



To add a contact:

1. Press **DIR** when the phone is idle, and then select **ALL CONTACTS**
2. Press **ADD** to add a contact
3. Enter a unique contact name in the **NAME** field and contact numbers in the corresponding fields
4. Press **SAVE** to accept the change

To edit a contact:

1. Press **DIR** when the phone is idle, and then select **ALL CONTACTS**
2. Press  or  to select the desired contact, press **OPTION** and then select **DETAIL** from the prompt list
3. Edit the contact information
4. Press **SAVE** to accept the change

To delete a contact:

1. Press **DIR** when the phone is idle, and then select **ALL CONTACTS**
2. Press  or  to select the desired contact, press **OPTION** and then select **DELETE** from the prompt list
3. Press **OK** when the LCD screen prompts "Delete Selected Item?"


VOLUME ADJUSTMENT

Press  to adjust the volume

HOW TO CONNECT TO WIFI


1

Starting at the main screen, press the "Menu" soft key

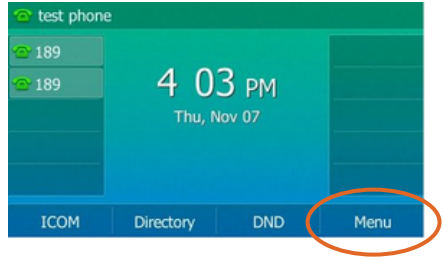


2

Next select "Basic" using the 4 arrow keys and "Ok" button

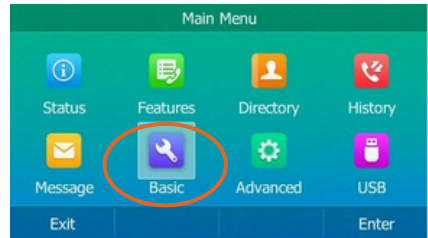

3

From "Basic Settings" press 8 for "Wi-Fi"

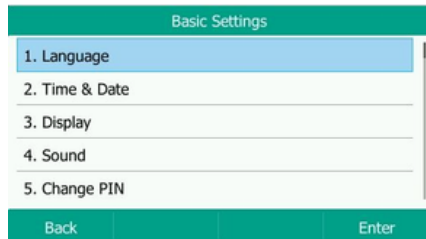


4

Turn on the Wi-Fi "On" if it is off using "<" and ">". Click "Save"




5

It will say scanning then display this page. Press 4 for "Available Networks," and choose your Wi-Fi network.

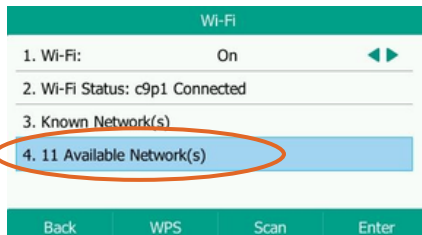


6

Now enter your Wi-Fi password. The 2nd softkey below the screen allows you to switch between "abc, ABC, 2aB, and 123" to make it easier to enter your password. Use "*" key to get to special characters.

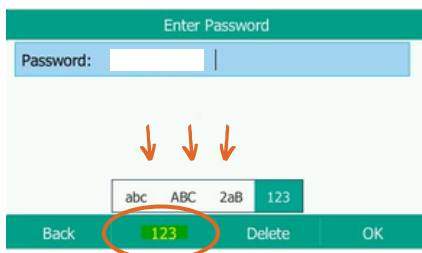

PHONE ASSEMBLY

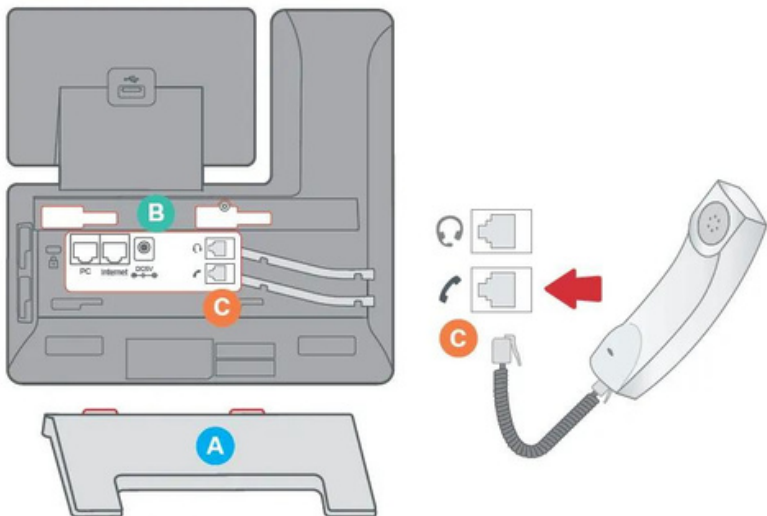

1. Attach the phone stand to the body. Align the stand **A** with the slots **B**, and slide up until you hear a click.
2. Connect the phone handset to the handset jack **C** using the coiled phone cord.

PERSONAL INFORMATION

Name _____

Extension _____

Mailbox _____

Mailbox Password _____

New Mailbox Password _____

General Mailbox _____

General Mailbox Password _____

Agent ID _____

SONICTEL PORTAL INFORMATION

To access the Sonictel portal, visit pbx.sonictel.io

Username _____

Password _____

If you need additional assistance after reading through this user guide, please contact the Sonictel Support Team by:



PHONE: 1.844.SONICTEL, Option 3



EMAIL: Open up a trouble ticket by sending an email with an explanation of the issue that you're having to help@sonictel.com



PORTAL: Open up a ticket at <https://help.sonictel.com/>

